

WALKING BEAM TRANSFER SYSTEM

FALCON 1200 & 8500


WALKING BEAM TRANSPORT SYSTEMS

SIKAMA International has developed a new type of transport system for the Falcon 8500 and the Falcon 1200 Reflow and Curing systems. The new transport system, called a “walking beam”, incorporates beams that span the length of the furnace and allow for smooth, accurate, and safe transport of the most critical substrates. It’s simple and robust design enhances the performance of the patented thermal technology based on conduction heating in combination with forced thermal convection by reducing temperature differences across the substrate surface. Transitional temperature differences are eliminated by heating and cooling the entire substrate at the same time. The design “lifts” the substrate from the bottom, eliminating any chance of backside scratching or product breakage.



FEATURES

- ◆ Substrate is picked up and moved from zone to zone
- ◆ Eliminates backside scratching or wear of product/fixtures
- ◆ Simplified maintenance and cleaning
- ◆ Eliminates product breakage
- ◆ SMEMA compatible
- ◆ Simple robust design

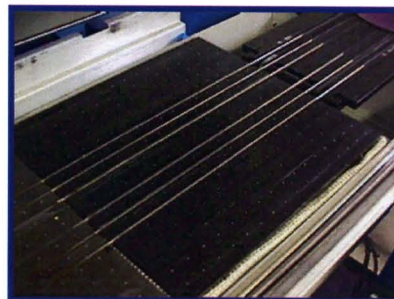

SIMPLE • EFFICIENT • ECONOMICAL

All SIKAMA products designed and manufactured in Santa Barbara, California
Specification subject to change without notice.
© 2008 All rights reserved. Content subject to change.

WALKING BEAM TRANSFER SYSTEM

WALKING BEAM SYSTEMS

TYPICAL SPECIFICATIONS...

	FALCON 8500 WB	FALCON 1200 WB
Heating Zones	5	7
Cooling Zones	1	1
Total Zones	6	8
Platen Size	8 in W x 12 in L	12.5 in W x 13.5 in L
Min. Substrate Size	3 inches	3 inches
Max Substrate Size	8 in W x 11 in L	12 in W x 12 in L
Weight Limit	Approx. 2.5 lbs	Approx. 2.5 lbs
Dwell & Travel Time	10 sec. – 99 min, 59 sec.	16 sec. – 99 min, 59 sec.
Temperature (Std.)	Up to 420C	Up to 420C
Temp. Accuracy	+/- 2C	+/- 2C
Warm-up to 230C	15 min. approx.	15 min. approx.
Coolant Flow	0.5 to 2 GPM	0.5 to 2 GPM
Alarms	Over/Under Temperature, Gas Flow, Coolant Flow and Temperature, Motor Torque, SMEMA (or other) Interface	Over/Under Temperature, Gas Flow, Coolant Flow and Temperature, Motor Torque, SMEMA (or other) Interface
Parts Flow (specify)	L to R or R to L	L to R or R to L
Gas Consumption	1000 CFH	1200 CFH
O2 Level	<25 PPM (process dependent)	<25 PPM (process dependent)
Voltage (specify)	200-240 VAC, 50-60 Hz, 1 or 3 Ph	200-240 VAC, 50-60 Hz, 3 Phase
Start-up Power	10kW @ 240 VAC	33 kW @ 240 VAC
Power Consumption	50% Duty Cycle or less	50% Duty Cycle or less
Basic Unit Weight	750 lbs	1000 lbs
Basic Dimension	L 126 x W 28 x H 45 inches L 140 with paddle adapters	L 178 x W 24 x H 45 inches L 178 with paddle adapters

SIKAMA



For more information contact:

SIKAMA International Inc.
118 E. Gutierrez Street • Santa Barbara, CA 93101
Phone: (805) 962-1000 • Fax: (805) 962-6100
E-mail: sales@sikama.com • <http://www.sikama.com/>

SIMPLE • EFFICIENT • ECONOMICAL

All SIKAMA products designed and manufactured in Santa Barbara, California
Specification subject to change without notice.

© 2008 All rights reserved. Content subject to change.